

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.

Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

**DANGER**

KEEP OUT OF REACH OF CHILDREN

# Resene

## Solventborne Aquapel water repellent exterior/interior

A-LL27904 12/20

### SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes serious eye irritation. Causes mild skin irritation. May cause damage to organs through prolonged or repeated exposure. Suspected of damaging fertility or the unborn child. May be fatal if swallowed and enters airways. Suspected of causing cancer. Toxic to aquatic life with long lasting effects.

### PRECAUTIONS

DO NOT BREATHE MIST, VAPOURS OR SPRAY. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT.

Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Ground and bond container and receiving equipment. Use explosion-proof electrical, ventilating, lighting and intrinsically safe equipment. Use non-sparking tools. Take action to prevent static discharges. Avoid release to the environment.

### FIRST AID

IF SWALLOWED: Immediately call a POISON CENTRE, doctor or first aider. Do NOT induce vomiting.

IF ON SKIN (or hair): Take off immediately all contaminated clothing. Rinse skin with water. If skin irritation or rash occurs get medical advice or attention.

IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if present and easy to do so. Continue rinsing. If eye irritation persists get medical advice or attention.

IF INHALED: If breathing is difficult, remove to fresh air and keep at rest in a position comfortable for breathing. If experiencing respiratory symptoms call a POISON CENTRE, doctor or first aider.

When seeking medical advice take this container with you. If exposed or concerned: Call a POISON CENTRE.

Further information can be obtained from  
AUST: POISONS INFORMATION CENTRE 131 126  
or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)  
or call Resene 0800 737 363.

For use as a water repellent on most porous building materials.

For full technical instructions see Data Sheet D655.

CONTAINS: Isoparaffins Petroleum Hydrotreated >720 g/L.

**SPILLS:** Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority. Clean up spillage.

**CLEANING PAINT EQUIPMENT:** Brush/roll out as much paint as possible on to newspaper before washing out brushes/rollers with the recommended thinner. Do not allow thinner to enter any drains. Refer to your local Council for disposal of dirty thinner.

**FIRE:** Use foam, carbon dioxide or dry chemical powder.



SHAKE WELL BEFORE USE



Resene Solventborne Aquapel is a clear silicone water repellent for application on most porous building materials to impart watershedding properties.

### Preparation

• Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.

• Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

• If mould is present, treat with Resene Moss & Mould Killer (see Data Sheet D80). Flush clean with water.

• Remove oil and grease from surface using Resene Paint Prep and Housewash.

• **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

• This product may be used to treat a wide variety of surfaces. If the surface you propose to treat is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or reseller.

### Application

• Resene Solventborne Aquapel can only be used over a porous surface that will allow the treatment to penetrate. It cannot be applied over a fully sealed surface then overcoated.

• Stir thoroughly before use. Apply by brush, roller or low pressure spray.

• Saturate the surface with Resene Solventborne Aquapel.

• Remove any Resene Solventborne Aquapel that gets onto glass to avoid the risk of staining.

• If it starts to rain, immediately cease application and cover all treated areas that have yet to dry out.


• Maintain good ventilation throughout the drying and curing period to ensure the treatment is properly cured. Poor ventilation may inhibit curing and performance.

• Maximum hydrophobicity (or water repellency) develops after a few days weathering.

• Recoat after 6 hours under normal conditions.

### Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.

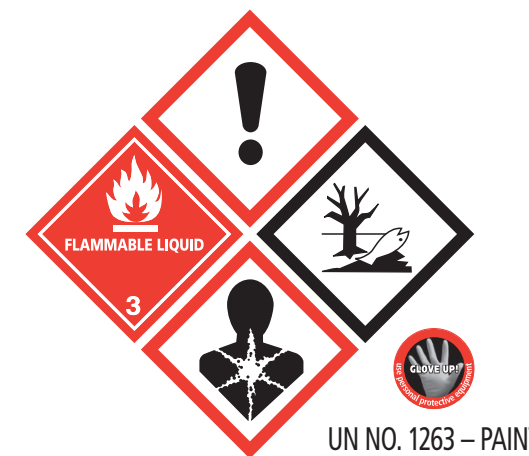

### FLAMMABLE LIQUID AND VAPOUR

Keep away from heat, hot surfaces, sparks, open flames and other ignition sources. No smoking.



Solventborne Aquapel SDS

# Resene

the paint the professionals use



Solventborne Aquapel TDS

In Australia: Resene Paints (Aust) Limited  
7 Production Ave, PO Box 924, Beenleigh, Qld 4207  
Ph 1800 738 383 Visit [www.resene.com.au](http://www.resene.com.au)

In New Zealand: Resene Paints Limited  
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045  
Ph (04) 577 0500 Visit [www.resene.co.nz](http://www.resene.co.nz)

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. Printed on paper produced in manufacturing facilities which comply with environmental management systems EMAS and ISO 14001, using vegetable-based inks. Please recycle.

net contents 4 litres

### Quick check

**Use on:** Most porous building materials.

**Gloss level:** None – fully penetrating.

**Typical coverage:** Dependent on surface porosity – typically 2.5 square metres per litre for concrete block, 8-10 square metres per litre for concrete (tilt, precast, plaster).

**Dry time (minimum):** Penetrates – up to 48 hours for solvent to evaporate.

**Primer required:** No.

**Usual number of coats:** 1-2 to achieve saturation.

**Application method:** Low pressure spray is best, brush or roller.

**Thinning and clean up:** Mineral turps.

**Colour range:** Clear.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.