

Resene product labels are updated from time to time. This label is provided as a guide for this product and may differ from the label on the container you purchase.
Please discuss your project with your local Resene ColorShop team or reseller to ensure you have the right products to give you the best quality finish for your specific project.

SAFETY PRECAUTIONS

Read label before use. Keep out of reach of children. Causes mild skin irritation. May cause an allergic skin reaction. Suspected of causing cancer. Toxic to aquatic life with long lasting effects.

PRECAUTIONS

AVOID BREATHING FUMES, MISTS, VAPOURS OR SPRAYS. DO NOT EAT, DRINK OR SMOKE WHEN USING THIS PRODUCT. Store in original or correctly labelled container, tightly closed, in a well ventilated area indoors, away from foodstuffs, at an ambient temperature and avoid freezing conditions. Store locked up. Wear protective gloves and clothing, eye and face protection. Contaminated work clothing should not be allowed out of the workplace. Avoid release to the environment.

FIRST AID

IF SWALLOWED: Call a POISON CENTRE, doctor or first aider if you feel unwell.

IF ON SKIN (or hair): Wash with plenty of soap and water. If skin irritation occurs get medical advice. Take off all contaminated clothing and wash before reuse.

IF IN EYES: Rinse cautiously with water for several minutes. Continue rinsing. If eye irritation persists get medical advice or attention.

If exposed or concerned get medical advice or attention.

When seeking medical advice take this container with you.

Further information can be obtained from

AUST: POISONS INFORMATION CENTRE 131 126 or call Resene 1800 738 383.

NZ: NATIONAL POISONS CENTRE 0800 POISON (764 766)

or call Resene 0800 737 363.

CONTAINS: Zinc Phosphate 10-120 gms/L.

For use as a surface preparation coating.

For full technical instructions see Data Sheet D47a.

SPILLS: Wear appropriate protective clothing. Absorb with sand or earth. Collect and seal in properly labelled drums. Do not allow to enter drains or to run off into waterways. Refer to local waste management authority.


CLEANING PAINT EQUIPMENT: Brush/roll out as much paint as possible onto newspaper before washing brushes and rollers. Dispose of wash-up water onto grassy/unsealed area or into inside sink/basin, NOT into outside stormwater drain where it may harm fish in local waterways.

Resene

water
borne

Smooth Surface Sealer

exterior/interior

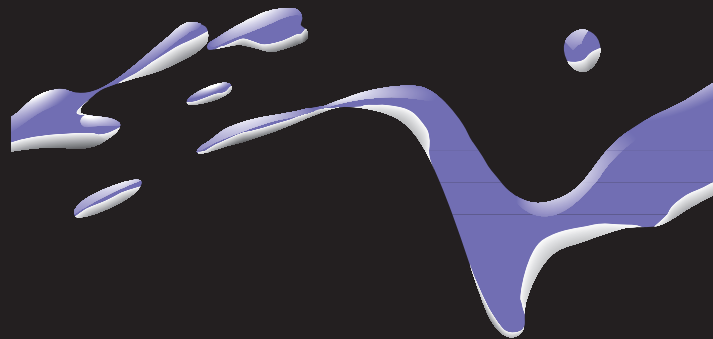

9 418022 026464

Resene Waterborne Smooth Surface Sealer has been tailored to be a waterborne adhesive primer over a series of surfaces usually considered difficult to coat or in need of expensive pre-treatment. Fast drying, easy application and wide compatibility with topcoats are added features of this product.

Preparation

• Ensure substrates to be coated are in sound condition, dry, free from dirt, dust, loose material, oil (including mineral oil based wood finishes or similar) and salt.

• Remove accumulated windblown salt by washing with Resene Paint Prep and Housewash (see Data Sheet D812).

• Wherever oil and grease are present ensure the surface to be coated is thoroughly cleaned using Resene Paint Prep and Housewash. Flush clean with water. For heavy contamination scrub down with Resene Emulsifiable Solvent Cleaner (see Data Sheet D804) then rinse clean with water.

• Glossy surfaces – ensure these are free from all loose and partly adherent material and degrease if necessary with Resene Paint Prep and Housewash followed by liberal rinsing with clean water. For maximum adhesion some light mechanical keying is an advantage.

• **All sanding dusts may be harmful and appropriate protection must be worn. In particular dusts from old lead or chromate based paints or old building materials containing asbestos may be injurious to health if inhaled or ingested. Seek expert advice if the presence of these materials is suspected.**

• Consult your Resene ColorShop or Reseller for technical advice if corrosion is present.

• This product may be used to paint a wide variety of surfaces. If the surface you propose to paint is unsound or not referred to, try a small test area first or contact your local Resene ColorShop or Reseller for advice.

Application

• Apply one full coat. Will obtain maximum adhesion after several days.

Be PaintWise

For tips on responsible disposal of paint, cleaning equipment and minimising the impact of your decorating on the environment see the Resene website. Do not discharge any paint into the environment. Resene PaintWise (NZ) or paintback.com.au (Australia) accepts residual unwanted paint and packaging. Or contact your Local Authority for disposal information.



Waterborne Smooth Surface Sealer SDS

Resene

the paint the professionals use



Waterborne Smooth Surface Sealer TDS

In Australia: Resene Paints (Aust) Limited
7 Production Ave, PO Box 924, Beenleigh, Qld 4207
Ph 1800 738 383 Visit www.resene.com.au

In New Zealand: Resene Paints Limited
Vogel St, PO Box 38242, Wgtn Mail Centre, Lower Hutt 5045
Ph (04) 577 0500 Visit www.resene.co.nz

Manufactured under a quality system certified as complying with ISO9001 by Telarc SAI, an accredited certification body. This product complies with all the requirements of an APAS Paint Specification. Refer to the APAS Specification list on the Resene website for full details. Printed on environmentally responsible paper, which complies with the requirements of environmental management systems EMAS and ISO14001, using vegetable-based inks.

Quick check

Use on: Glass/ceramics, old varnished surfaces, most glazed surfaces, baked enamels, laminated surfaces, aluminium, copper and its alloys.

Coverage: 11 square metres per litre per coat.

Dry time (minimum): Touch dry 15 minutes. Drying is slowed by low temperatures and high humidity. Do not apply under damp conditions.

Recoat time (minimum): 2 hours when overcoating with waterborne products. 4 hours when overcoating with solventborne products, such as Resene Uracryl 403 and Resene Imperite I.F. 503. Always use Resene Enamel Undercoat before topcoating with alkyds.

Overcoating: Resene Waterborne Smooth Surface Sealer is not designed to give long-term exterior protection without overcoating.

Usual number of coats: One.

Application method: Brush, speed brush, roller or spray. Light bubbling may occur with some rollers and will require laying off.

Thinning: Water.

Clean up: Water when wet. Resene Brush Clean when dry.

Colour: Pastel blue/green when wet, off-white on drying.

Before use: Stir well with a wide flat stirrer.

Enjoy the Resene Promise of quality on premium paints. See your Resene ColorShop or the Resene website for a copy.

In every case it is recommended that the appropriate Data Sheet and Safety Data Sheet are consulted prior to application.

Please ensure that use of this product is compatible with the substrate and surface preparation method and that the colour in this container is the same as selected. Resene does not accept any responsibility for the application of incorrect product to substrate or the application of incorrect colours. Resene products are designed to be used as a system for optimal results. Substitution may cause substandard results or system failure. For further painting advice and information, call 1800 738 383 (AUST), 0800 737 363 (NZ) or visit the Resene website.